


FFK-komad 11° Double flanged bend 11°

FFK-komad 11°, PN 10/16, Lučni komad s prirubicama 11°
Double flanged bend 11° / 1/32, PN 10/16, according to FGR 71 or factory standard

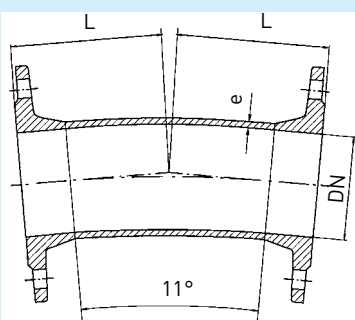


Mjere u mm · dimensions in mm			kg/komad kg/piece
DN	L	e	
40	140	7,0	7,0
50	150	7,0	9,0
65	165	7,0	12,0
80	120	7,0	9,6
100	140	7,2	12,2
125	150	7,5	15,5
150	160	7,8	22,4
200	180	8,4	32,5
250	210	9,0	47,0
300	255	9,6	60,9
350	105	10,2	57,2
400	220	10,8	97,9
500	135	12,0	106,9
600	174	13,2	170,0
700	194	14,4	292,0
800	213	15,6	321,8

Pažnja! Pri tlaku od 16 bara mijenjaju se bušenja za dimenzije veće od DN 150!
Attention! At pressure stage PN 16 drilling changes for pieces bigger than DN 150!

FFK-komad 22° Double flanged bend 22°

FFK-komad 22°, PN 10/16, Lučni komad s prirubicama 22°
Double flanged bend 22° / 1/16, PN 10/16, according to FGR 71 or factory standard

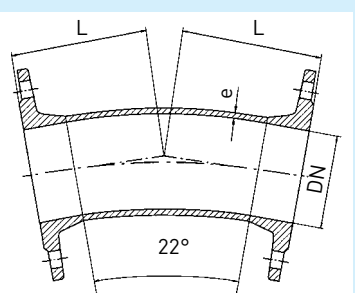

Mjere u mm · dimensions in mm			kg/komad kg/piece
DN	L	e	
40	140	7,0	7,0
50	150	7,0	7,4
65	165	7,0	12,0
80	120	7,0	9,7
100	140	7,2	12,5
125	150	7,5	15,7
150	160	7,8	22,5
200	180	8,4	33,5
250	210	9,0	48,6
300	255	9,6	68,2
350	140	10,2	63,7
400	270	10,8	108,9
500	185	12,0	125,8
600	254	13,2	203,0
700	284	14,4	327,0
800	314	15,6	418,0

Pažnja! Pri tlaku od 16 bara mijenjaju se bušenja za dimenzije veće od DN 150!
Attention! At pressure stage PN 16 drilling changes for pieces bigger than DN 150!